

HELLCAT SELECT

Quick Connect Exit Light with Self Testing

TESEM14633




DESCRIPTION

The TES HELLCAT SELECT Quick Connect Exit Light with Self Testing is designed to provide reliable emergency egress illumination in commercial, industrial, and public buildings. Combining modern styling with dependable performance, it helps ensure safe evacuation pathways during power outages and emergency situations while offering added peace of mind through automated compliance monitoring.



TESEM14633	
Construction	Polycarbonate Body with Polycarbonate Diffuser
Mounting	Wall, Ceiling Single-Sided & Ceiling Double-Sided
Operating Mode	Maintained / non-maintained
Operating System	Manual Test Switch
Charging Method	Constant Current (16hrs), Pulse Charge (Standby)
Lamps	LED
Operating Voltage	240V, 50Hz
Power Consumption	3 Watts (Standby)
Operating Temperature	1°C to 40°C
AS2293 Classification	C0=D12.5 C90=D8
Viewing Distance	24m
Emergency Duration	90 Minutes
IP Rating	IP20

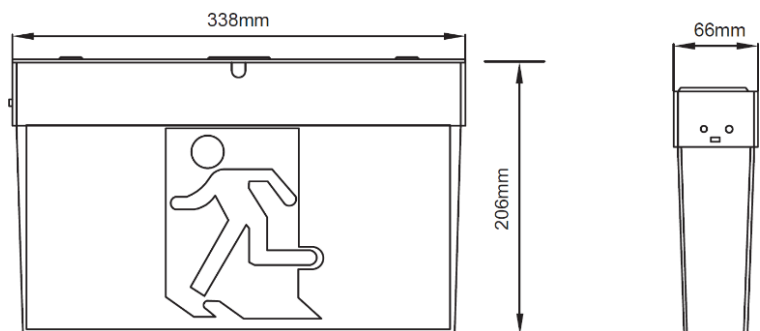

HELLCAT SELECT

Quick Connect Exit Light with Self Testing

TESEM78548



PRODUCT FEATURES

- Energy Efficiency LED – Low 3W standby power consumption.
- One Box Solution – Comes with both single and double-sided decals in running man “Pictograph” and the “EXIT” decal.
- Easy Install – Comes with large terminal block & cable entry
- Long Life LED – Energy efficient, long-life LED
- Integrated Self-Testing Function – Automatically performs routine testing to ensure ongoing compliance and operational readiness.
- Fully Compliant to AS2293 Standards

SUPPLIER INFORMATION

Product Code	TESEM14633
Barcode	9337376146331
5 Digit Code	14633
Warranty (Fitting)	5 Years
Box Qty	1
Carton Qty	10
Standards	AS2293
Weight (kg)	1.35
Dimensions (mm)	338 X 206 X 66

5 Centre Place WETHERILL PARK NSW 2164

PO Box 3107 | Ph: 1300 287 487 | Email: sales@gtsonline.com.au
gtsonline.com.au